

GW04 21 Manual soap dispenser




GW04 21 04 01 AISI 304 Brushed



GW04 21 04 03 AISI 304 Black matt

BACK VIEW WALL MOUNTING

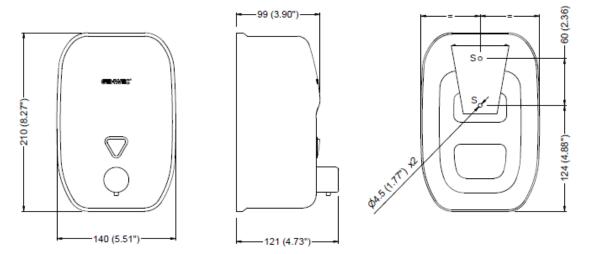

Dimensions: ±3%

TECHNICAL DATASHEET

COMPONENTS AND MATERIALS

• Container – 0.8mm AISI 304 stainless steel. Unit is equipped with a central acrylic level viewer and a lock keyed lid for top refilling. Capacity of the unit is of 1.800ml.

• Valve – Unit is equipped with AISI 304 stainless steel push button. Valves are designed and tested to avoid soap dripping.

• Fixings set – AISI 304 stainless steel mounting bracket, one key for lid opening, two 6mm wall plugs, two 4mm screws.

OPERATION

Corrosion resistant valve dispenses all-purpose hand soaps. Use only chloride-free pH-neutral liquid soaps. Alcohol based sanitisers are not recommended. Valve is operable only with one hand to comply with accessible design guidelines. Acrylic level viewer indicates when refill is necessary. Open top lid with supplied key for direct refilling.

MOUNTING

Secure mounting bracket on wall by drilling two 6mm holes to suit provided wall plugs (6mm) and screws (4mm) at S points indicated in technical design. Slide down soap dispenser inside mounting bracket and secure unit with inside locking screw. Recommended mounting height is 100-110 cm from floor to push button or 15-20 cm from washbasin to push button.

ARCHITECTURAL SPECIFICATION

Genwec Vertical wall mounted manual soap dispenser shall be AISI 304 stainless steel with a capacity of 1.800ml. Unit shall dispense allpurpose hand soaps. Valve shall be operable with one hand to comply with accessible design guidelines. Container shall be equipped with an acrylic level viewer and a keyed lock lid on top for refilling.

SPARE PARTS

GW04 21 90 00 GW04 21 90 01 Pushbutton valve Accessories set (keys, screws, wall mounting)