

## TECHNICAL MOBILITY SUPPORTS **GW11 60 03 00 Folding bar with vertical rotation bar of 760 mm with leg**



### Product description

Folding bar with vertical rotation  
 Drop-down leg for added support  
 Locking in vertical position  
 Carbon steel tube with  $\varnothing 32$  mm and 1,5 mm of thickness.  
 Wall support made in carbon Steel of 3 mm thickness  
 White epoxy finish  
 Anti-vandalism product. Heavy duty.  
 Length: 760mm.

### Technical specifications:

Folding bar with vertical rotation with drop-down leg. The bar is composed of two carbon steel tubes with a diameter of 32 mm and a thickness of 1.5. One of the tubes serves to grip the user while and the other serves as a support leg. Both are joined by two brackets and a screw that act as a turning axis. The wall support is composed of a 3mm thick carbon steel plate and a 3mm thick carbon steel gusset, the set welded by TIG welding, makes the function of supporting the axis of rotation of the folding bar. In this support there are 4 holes for fix the bar to the wall. The set has a white epoxy finish. The drop bar is compliant with American Barrier Removal (ADA) regulations. The bar is fixed to the wall by means of 6 nylon wall plugs and steel screws AISI304 of 6X50. Maximum static and dynamic load supporting: 120 Kg. The product total dimensions are 900x100x760mm. The folding bar model is GW11 60 03 00 manufactured by GENWEC WASHROOM S.L. – Av. Joan Carles I, 46-48 08908 L'Hospitalet de Llobregat.

### Technical characteristics

#### Product specifications

Carbon steel tube with  $\varnothing 32$  mm and 1,5 mm of thickness.  
 Drop-down leg with vertical lock  
 Six holes by support of  $\varnothing 10,5$  mm  
 Complete TIG welding  
 White epoxy finish.  
 Maximum static and dynamic load supporting: 120 Kg <sup>(1)</sup>

*(1) The weight supported depends on the type of wall. In this case, the data is for a solid brick factory with the supplied screws and plugs mounted correctly. For other types of wall, consult the manufacturer.*

#### Packing specifications


Packing type: Plastic bag  
 Individual packaging dimensions: 900x100x760 mm  
 Product dimensions: 900x100x760 mm  
 Units per carton: 5  
 Units per pallet: 70 (\*)

*(\*) maximum high 1,1m.*


GENWEC WASHROOM S.L. reserves the right to modify and/or rectify products and their specifications without prior notice.

Measures:  $\pm 3\%$

Revised by: MG\_v0 (10/2020)

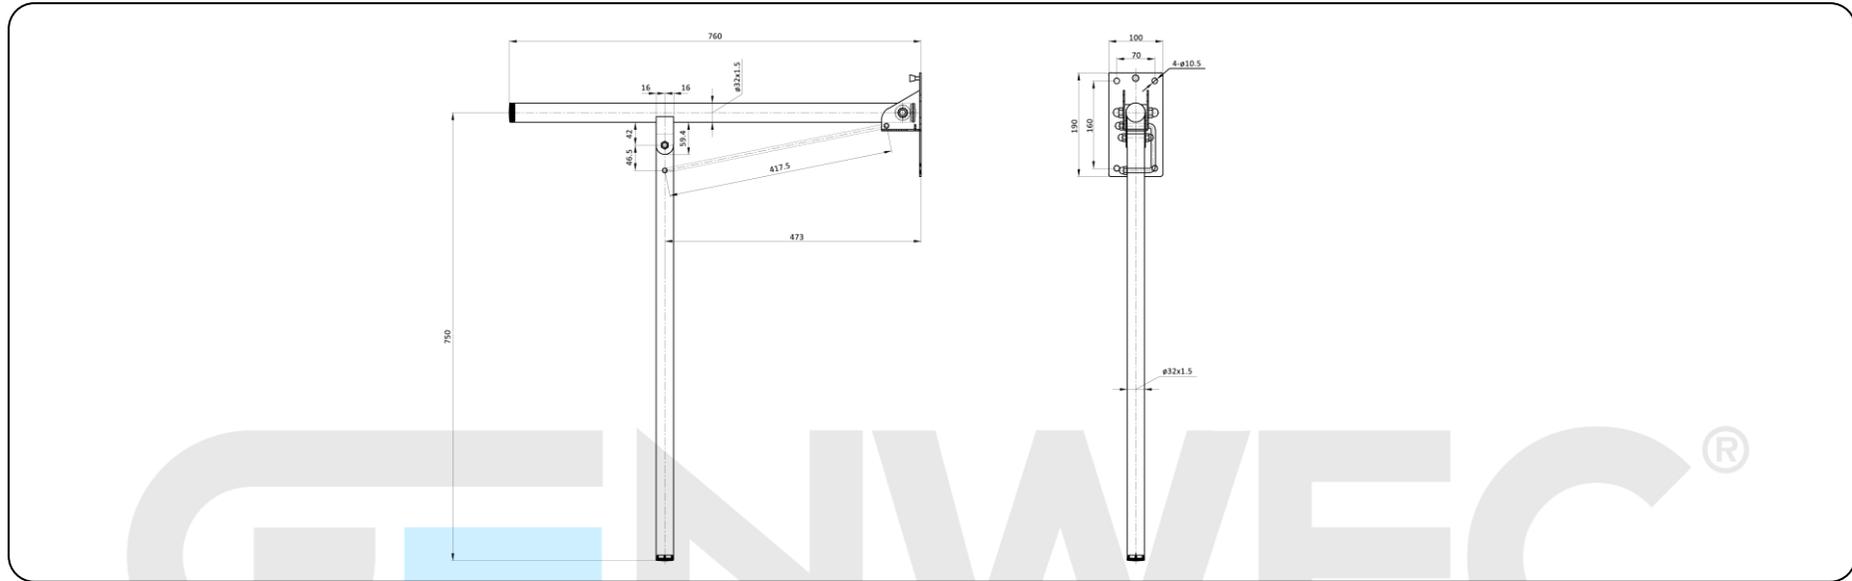

### Installation recommendations

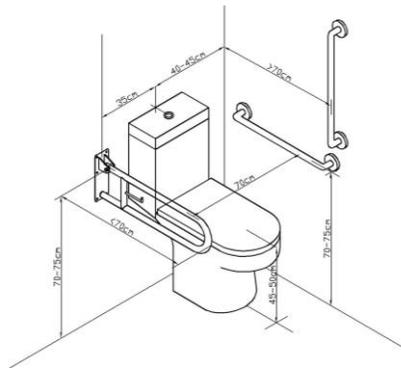

### Electrical insulation:

According to the Low Voltage Regulation, any metal element mounted in a bathroom or wet area must be grounded or electrically isolated. To get this isolation, GENWEC WASHROOM, S.L. has specific kits according to the type of bar.

**Operation:** The position of use of the folding bar is horizontal, the folded position is only recommended to allow accessibility.

**Cleaning:** A cotton cloth slightly dampened in a soapy solution is recommended. Then dry off.

GENWEC WASHROOM S.L. reserves the right to modify and/or rectify products and their specifications without prior notice.

Measures:  $\pm 3\%$

Revised by: MG\_v0 (10/2020)